### Automotive **Controller unit**


## 7. Eyelet (lug terminal) sensor

Screw mount type temperature sensor with very good heat conductivity that allows the sensing of high temperatures.

- Zero power resistance R\_{75}: 7.214 k\Omega  $\pm$  5% B value B<sub>0/100</sub>: Temperature range :
  - 3970 K ± 2% - 40 to 130℃

Thermal time constant: approx. 75 sec. Breakdown voltage: AC 600 V 1 sec. Insulation resistance: DC 500 V 100 MQ+



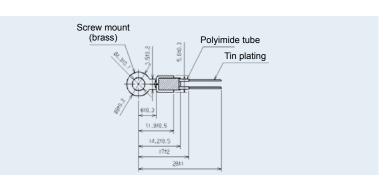

# 8. Eyelet (lug terminal) sensor

Screw mount type temperature sensor with very good heat conductivity that allows highly accurate sensing of high temperatures.


Zero power resistance  $R_{\text{25}}$ : 10.0 k $\Omega$   $\pm$  0.5% B value B<sub>25/85</sub>: Temperature range :

3435 K ± 0.5% – 40 to 125℃

Thermal time constant: approx. 80 sec. Breakdown voltage: Insulation resistance: DC 500 V 100 MQ+

AC 1800 V 1 sec.



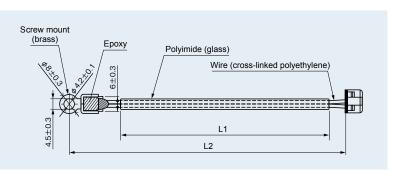


# 9. Eyelet (lug terminal) sensor

Temperature sensor that resists screw tension and can therefore be used for a long time.

Zero power resistance R<sub>25</sub>:  $2 k\Omega \pm 1\%$ B value B<sub>25/85</sub>: 3182 K ± 1% Temperature range: - 40 to 90℃

Thermal time constant: approx. 80 sec. Breakdown voltage: AC 600 V 1 sec. Insulation resistance: DC 500 V 100 MQ+

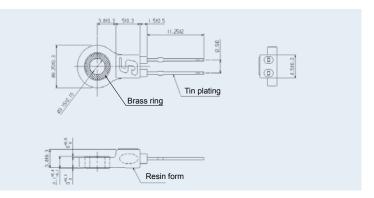


## Automotive

#### Motor

## **10. Screw housing sensor**

Screw type temperature sensor with high accuracy and excellent climate resistance.

Thermal time constant: approx. 298 sec. Breakdown voltage: AC 600 V 1 sec. Insulation resistance: DC 500 V 100 M $\Omega$ +

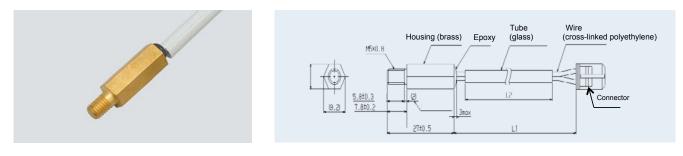


### **11. PTFE tube sensor**

Temperature sensor with a thin tip and excellent responsiveness.

Zero power resistance  $R_{100}$ : 1.0 k $\Omega \pm 5\%$ B value  $B_{0/100}$ : 3387 K  $\pm 2\%$ Temperature range: -40 to 250°C Thermal time constant: approx. 7 sec. (oil)Breakdown voltage:AC 1200 V 1 sec.Insulation resistance:DC 500 V 100 MΩ+



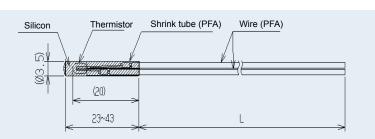

### **Battery / capacitor**

## 12. Slim case sensor

Slim case sensor with high breakdown voltage that fits easily into narrow spaces.

Thermal time constant: approx. 25 sec. Breakdown voltage: AC 2160 V 1 sec. Insulation resistance: DC 500 V 100 M $\Omega$ +

(35.5) Lead wire Case (2) Lead wire